



Digital product and function overview to scan.

PRODUCT DATA SHEET

Product view




Product information

Product group	Adaptor Coupling FKM
Item number	CRA17415FKM
EAN / GTIN	4260431851497
Product name	Adaptor Coupling CAC 1922 FKM

Product description

External flexible coupling designed to connect two pipes with different dimensions (DN) as well as same or different materials and surface textures; Fluorinated rubber (FKM) suitable for high chemical loads such as chlorine, grease, acids, alkalis, oil and petrol; with acoustic decoupling; suitable for horizontal or vertical installation; for temperatures up to +200°C

Technical drawing

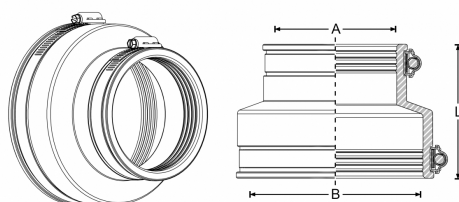

Dimensioning

A Size range	170-192 mm
B Size range	110-122 mm
L Length	120 mm

Specification

Pressure tightness	0,6 bar
Vacuum tightness	-0,3 bar
Jetting resistance	120 bar
Socket wrench	SW 8 mm
Tightening torque	6,0 Nm
Weight	0.9 kg
Material	FKM, Stainless steel (AISI 304)

CE certification

gemäß / according to	ISO 1629, ASTM D 1418
----------------------	-----------------------

Resistances

Heat resistant	200 °C
Cold resistant	-25 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

