



Digital product and function overview to scan.

PRODUCT DATA SHEET

Product view




Product information

Product group	Standard Coupling Type 2A
Item number	CRA16151
EAN / GTIN	4260182341513
Product name	Standard Coupling CTC 165 Type 2A

Product description

External flexible standard coupling designed to connect two vitrified clay pipes with the same dimensions (DN) as well as same materials and surface textures; shear band ensures joint integrity and pipe alignment under load; outside diameter differences with more than 12 mm have to be compensated with Crassus Bushes; in accordance with DIN EN 295-4; with acoustic decoupling; suitable for horizontal or vertical installation; suitable for flush-mounting and soil; UV-resistant material

Technical drawing

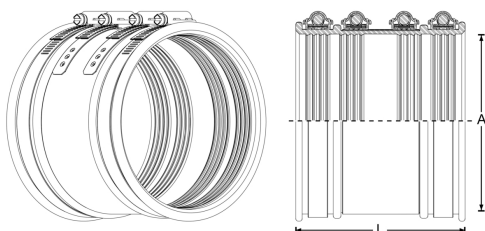

Dimensioning

A Size range	150-165 mm
L Length	102 mm

Specification

Pressure tightness	0,6 bar
Vacuum tightness	-0,3 bar
Jetting resistance	120 bar
Socket wrench	SW 8 mm
Tightening torque	6,0 Nm
Weight	0.58 kg
Material	EPDM, Stainless steel (AISI 304)

CE certification

gemäß / according to	EN 681-1, EN 295/4
----------------------	--------------------

Resistances

Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

