



Digital product and function overview to scan.

## PRODUCT DATA SHEET

### Product view




### Product information

Product group	Adaptor Coupling FKM
Item number	<b>CRA12040FKM</b>
EAN / GTIN	4260431851435
Product name	Adaptor Coupling CAC 1221 FKM

### Product description

External flexible coupling designed to connect two pipes with different dimensions (DN) as well as same or different materials and surface textures; Fluorinated rubber (FKM) suitable for high chemical loads such as chlorine, grease, acids, alkalis, oil and petrol; with acoustic decoupling; suitable for horizontal or vertical installation; for temperatures up to +200°C

### Technical drawing

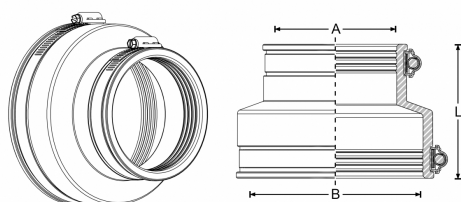

### Dimensioning

A   Size range	110-122 mm
B   Size range	80-95 mm
L   Length	100 mm

### Specification

Pressure tightness	0,6 bar
Vacuum tightness	-0,3 bar
Jetting resistance	120 bar
Socket wrench	SW 8 mm
Tightening torque	6,0 Nm
Weight	0.5 kg
Material	FKM, Stainless steel (AISI 304)

### CE certification

gemäß / according to	ISO 1629, ASTM D 1418
----------------------	-----------------------

### Resistances

Heat resistant	200 °C
Cold resistant	-25 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

