



Digital product and function overview to scan.

PRODUCT DATA SHEET

Product view




Product information

| | |
|---------------|-------------------------------|
| Product group | Adaptor Coupling FKM |
| Item number | CRA12033FKM |
| EAN / GTIN | 4260431851466 |
| Product name | Adaptor Coupling CAC 4000 FKM |

Product description

External flexible coupling designed to connect pipes of different materials and outside diameters, in accordance with DIN EN 295-4; for the reduction of different pipe dimensions; suitable for horizontal or vertical installation; suitable for flush-mounting and soil; UV-resistant material

Technical drawing

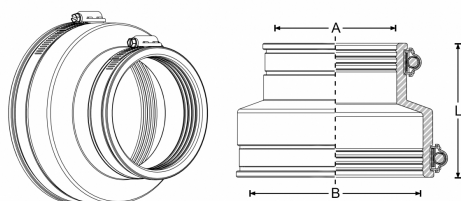

Dimensioning

| | |
|----------------|------------|
| A Size range | 121-136 mm |
| B Size range | 110-121 mm |
| L Length | 100 mm |

Specification

| | |
|--------------------|---------------------------------|
| Pressure tightness | 0,6 bar |
| Vacuum tightness | -0,3 bar |
| Jetting resistance | 120 bar |
| Socket wrench | SW 8 mm |
| Tightening torque | 6,0 Nm |
| Weight | 0.5 kg |
| Material | FKM, Stainless steel (AISI 304) |

CE certification

| | |
|----------------------|-----------------------|
| gemäß / according to | ISO 1629, ASTM D 1418 |
|----------------------|-----------------------|

Resistances

| | |
|-----------------------|--------|
| Heat resistant | 200 °C |
| Cold resistant | -25 °C |
| UV resistant | ✓ |
| Suitable for soil | ✓ |
| Flush-mounting suited | ✓ |

